


# CABS(除電電極)

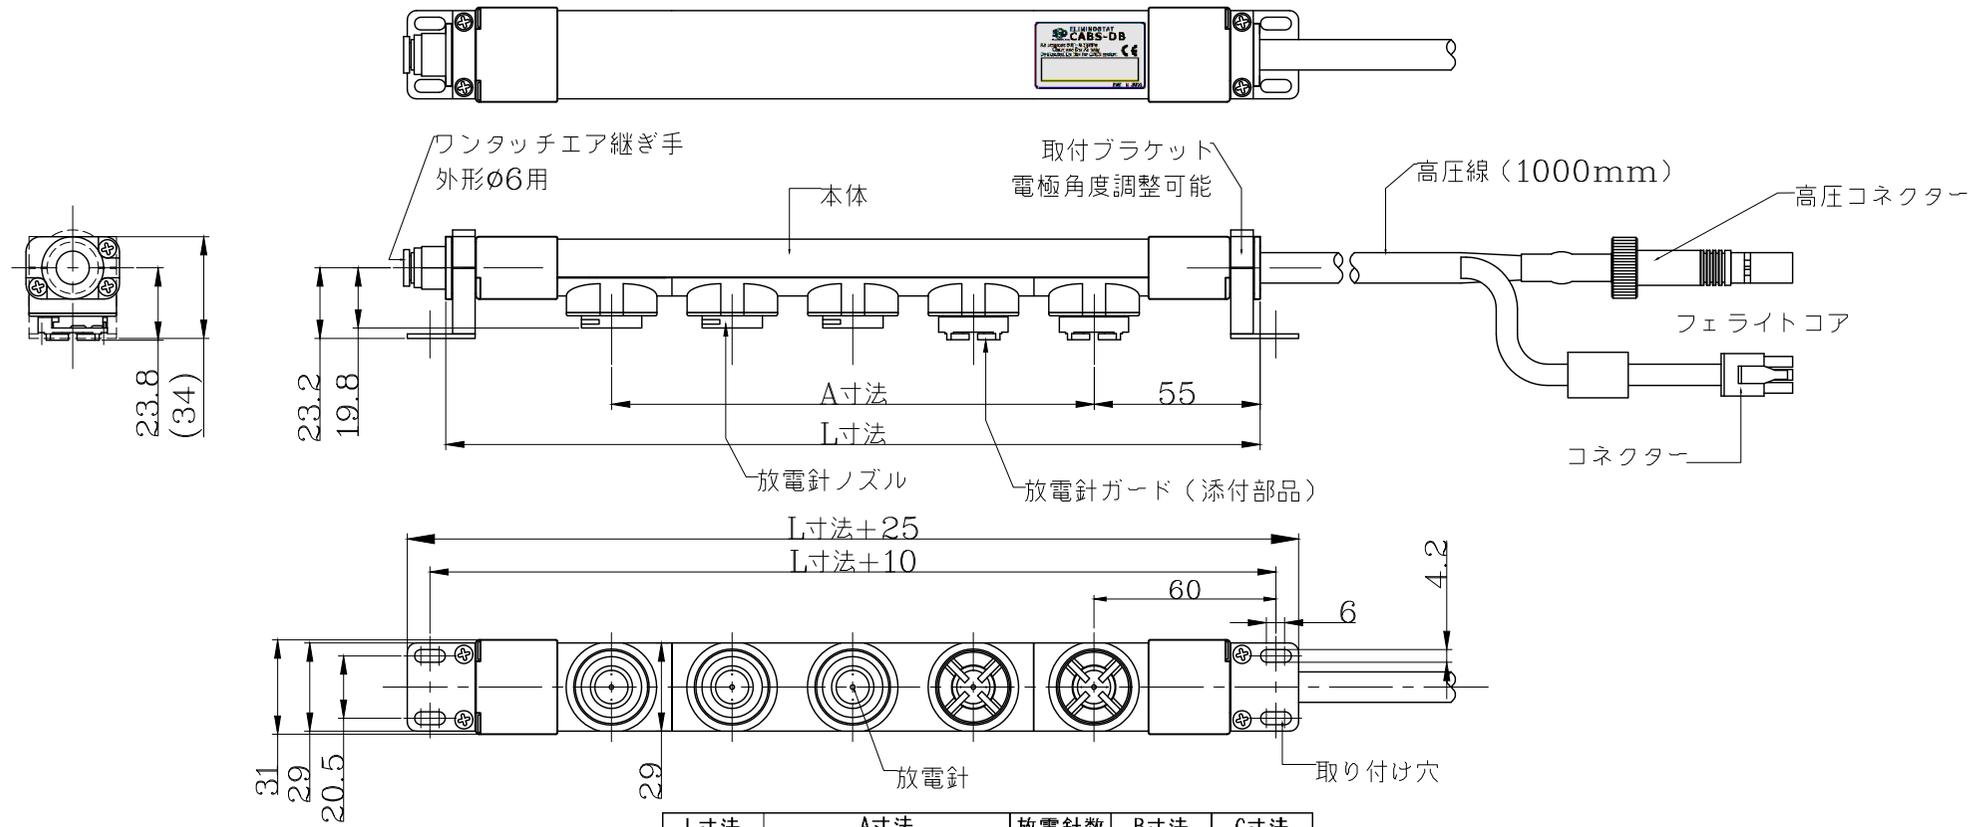

CABS(除電電極)の型式名称

CABS-DBW-\*\*\*\*

\*\*\*\*にはL寸法が入る

L寸法	A寸法	放電針数	B寸法	C寸法
110	40p x 0 = 0	1	120	135
150	40p x 1 = 40	2	160	175
190	40p x 2 = 80	3	200	215
230	40p x 3 = 120	4	240	255
270	40p x 4 = 160	5	280	295
310	40p x 5 = 200	6	320	335
350	40p x 6 = 240	7	360	375
390	40p x 7 = 280	8	400	415
430	40p x 8 = 320	9	440	455
470	40p x 9 = 360	10	480	495
510	40p x 10 = 400	11	520	535
550	40p x 11 = 440	12	560	575
590	40p x 12 = 480	13	600	615
630	40p x 13 = 520	14	640	655
670	40p x 14 = 560	15	680	695
710	40p x 15 = 600	16	720	735
750	40p x 16 = 640	17	760	775
790	40p x 17 = 680	18	800	815
830	40p x 18 = 720	19	840	855
870	40p x 19 = 760	20	880	895
910	40p x 20 = 800	21	920	935
950	40p x 21 = 840	22	960	975
990	40p x 22 = 880	23	1000	1015
1030	40p x 23 = 920	24	1040	1055